

# KM-F1060 Quick Guide

(For Internet Fax/Email and  
Network Scan Functions)

---

## Table of Contents

### Getting To Know Your Machine

Useful Office Functions.....	2
Multi-Tasking Job Table .....	2
Internet Fax/Email/Network Scan Features .....	3
Internet Fax/Email/Network Scan Features .....	3
Operation Chart.....	4

### Problem Solving

Information Code .....	8
Error Message .....	11

## Symbols/Icons



Place original(s) on the ADF



Go to next step




Press any Key on the Control  
Panel



Go to next step (below)

Before operating this equipment, please read these instructions completely  
and keep these operating instructions for future reference.



# Getting To Know Your Machine

## Useful Office Functions

### Fax

- Plain Paper High-speed Super G3 compatible Fax with JBIG compression.

### Copy

- Copy up to Legal size originals.
- Capable of copying text/photos/halftone originals.

### Email

- Email Function capability when the optional Internet Fax/Email/Network Scanner Module is installed.

### Scan or File

- Scanner capability when the optional Internet Fax/Email/Network Scanner Module is installed.
- Scanning resolution up to 600 dpi

### Print

- GDI Printer controller standard. Printer resolution 300 or 600 dpi.



### Application Software

- Document Manager
- Document Viewer
- Network Scanner
- Utilities (Network Status Monitor, Address Book Editor, Network Configuration Editor)
- Document Fax

■ The following Operating Instructions are included in the CD and refer it for detailed information.

#### <Facsimile & Copy>

Use the information provided on the enclosed CD (Operating Instructions) for a Facsimile and Copy functions.

**For example** : How to send/receive a Fax, make copies, add paper, replace the toner container, etc.

#### <Internet Fax/Email & Network Scan>

Use the information provided on the enclosed CD (Operating Instructions) for a Internet Fax/Email and Network Scan functions.

**For example** : How to send/receive a Email/Scanned Document(s), or when a trouble message appears, etc.

#### <Print & Other Advanced Functions>

Use the information provided on the enclosed CD (Document Management System) for Network Printer, Editing Directory Dialing Feature, Device Settings, Network Status Monitor, and/or Document Management System.

## Multi-Tasking Job Table

2nd Job	Current Job	Facsimile (Sending)		Facsimile (Receiving)		Copy	Network Scanning, Internet Fax		GDI Printing	
		Storing Document	Memory Transmission	Memory Receiving	Printing Received Memory Data		Storing Document	Transmission	Receiving Data	Printing Received Data
Facsimile (Sending)										
	Storing Document	—	●	●	●	—	—	●	●	●
	Memory Transmission	●	●*	●*	●	●	●	●	●	●
Facsimile (Receiving)										
	Memory Receiving	●	●*	●*	●	●	●	●	●	●
	Printing Received Memory Data	●	●	●	☆	☆	●	●	●	☆
Copy										
	Copy	—	●	●	▲	—	—	●	●	▲
Network Scanning, Internet Fax										
	Storing Document	—	●	●	●	—	—	●	●	●
GDI Printing										
	Receiving Data	●	●	●	●	●	●	●	—	●
	Printing Received Data	●	●	●	☆	☆	●	●	●	☆

● : Accepts and executes the 2nd Job.

▲ : Accepts and executes the 2nd Job (Copy) only if the Current Job is interrupted.


☆ : Accepts the 2nd Job and executes the 2nd Job after the Current Job is completed.

— : Not applicable.

#### NOTE

\* : Optional G3 Communication Port Kit is required.

## Internet Fax/Email/Network Scan Features

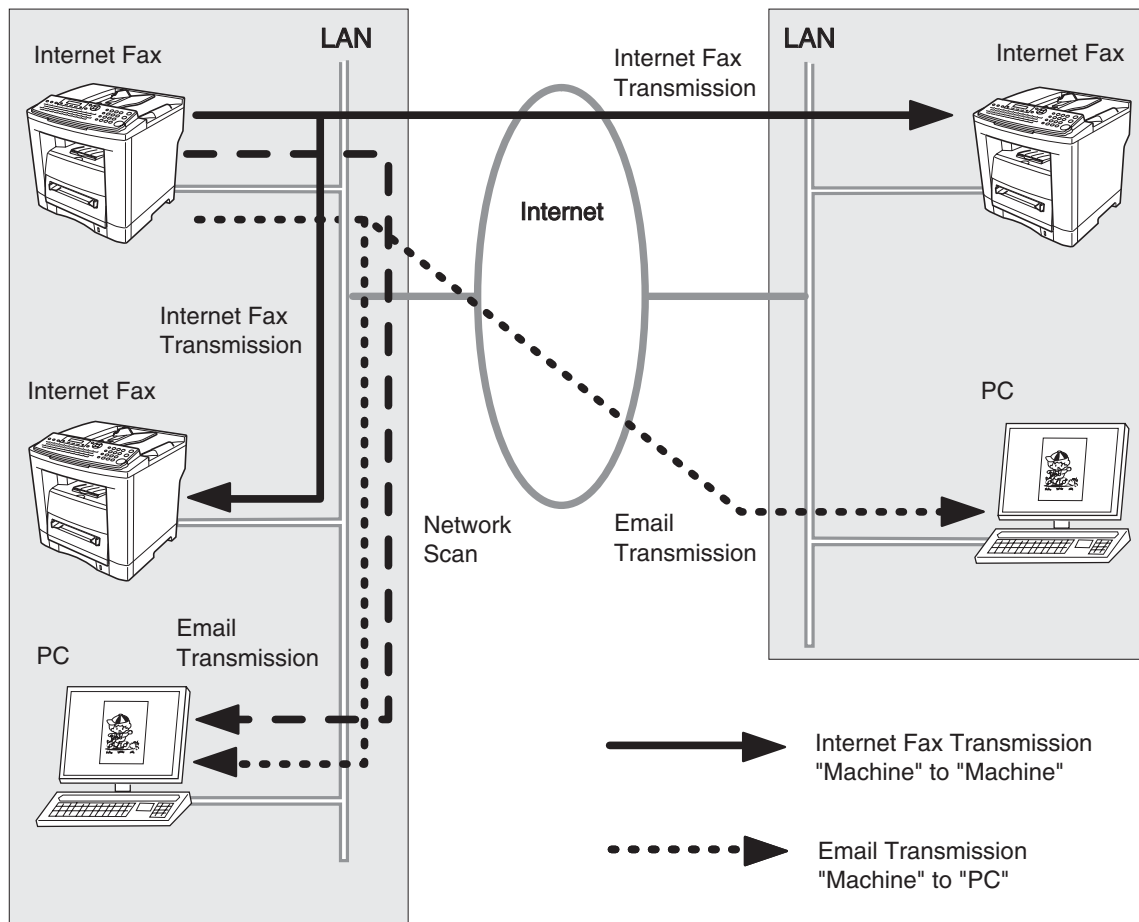

### Internet Fax / Email Compatible File Format

- Internet Fax : TIFF format only
- Email : TIFF or PDF format
- Network Scan : TIFF or PDF format




# Getting To Know Your Machine

## Operation Chart

### ■ Sending Documents via LAN

1



\*Hold the center of the guides when adjusting the width.

**NOTE:**  
You must never try to send/scan an original shorter than 4.7 in (120 mm).

**Original Guides\*** Max. 100 pages  
(Letter size originals)  
Adjust to the original's width


ENTER STATION(S)  
THEN PRESS START 00%

Make sure that the above message is shown on the display.  
If not, press the STOP key.

#### 3a Quick Name Search Email Addressing (see Note 3) (When Fax Parameter No. 119 is set to "2:Quick Name Search".)



Enter the first letter of the name you wish to search repeatedly until it is shown on the LCD display.  
Ex: "S"

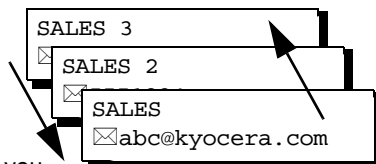

(See Note 5)



#### 3b One-Touch/ABBR. Email Addressing (see Note 3) (When Fax Parameter No. 119 is set to "1:One-Touch".)



Select One-Touch.

or



ABBR DIAL + ABBR No. (3-digit)

#### 3c Manual Email Addressing (Up to 50 Addresses)



Changes to Email Address input mode




Email Address(es)

#### 3d Directory Search Email Addressing (see Note 3)



Enter the first letter(s) of the name you wish to search (▼/▲).  
Ex: "SA"

ENTER LETTER (s)  
SA

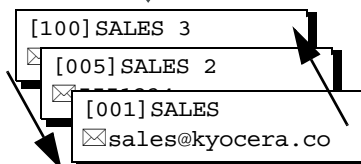

2

Select the desired Transmission setting.  
(See the column on the right)

3a

Quick Name Search Email Addressing

or

3b

One-Touch/ABBR. Email Addressing)

and/or

3c

Manual Email Addressing


and/or

3d


Directory Search Email Addressing

4

You can send the same document(s) to multiple stations. Multiple stations can be selected by any combination of the Steps 3a (3b), 3c and/or 3d, and then pressing **START**.



The document(s) is stored into memory with a file number. Then starts sending the document(s).

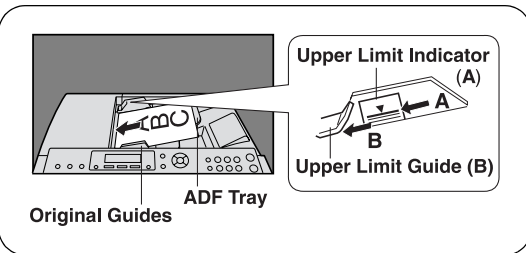

## Transmission Settings



Adjusting the Contrast of scanned image data by pressing cursor keys (◀/▶).

← Lighter Normal Darker →



(See Note 4)

**STANDARD** for standard originals  
**FINE** for detailed originals  
**S-FINE** for finer detailed originals  
**600 dpi** for 600 dpi detailed originals  
**HALFTONE (FINE)**

for photo originals with Fine Resolution

**HALFTONE (S-FINE)**

for photo originals with S-Fine Resolution

**HALFTONE (600 dpi)**


for photo originals with 600 dpi Resolution



Verification Stamp  
ON : The light is lit.  
OFF : The light is off.

## NOTE


1. If your machine sounds an alarm (pi-pi-pi) in Step 3 above, this indicates that the Auto Dialer is Full (More than 50 full email addresses are entered or 50 transmission reservations including G3 communication jobs have been already reserved).
2. To utilize the Email functions, your machine needs to be set up properly on your network. Please contact your network administrator for actual network setup.
3. Auto Dialer (Address Book or One-Touch/ABBR.) is only available when stations are registered.
4. When transmitting at S-Fine or 600 dpi, there is a possibility that printing quality may deteriorate at the remote station due to its reception capability. If this occurs, re-send with Direct Transmission or use "Fine" Resolution.
5. You can search for another name starting with the same character by scrolling with the Cursor Keys (▼/▲).



# Getting To Know Your Machine

## Operation Chart

### ■ To Stop the Transmission

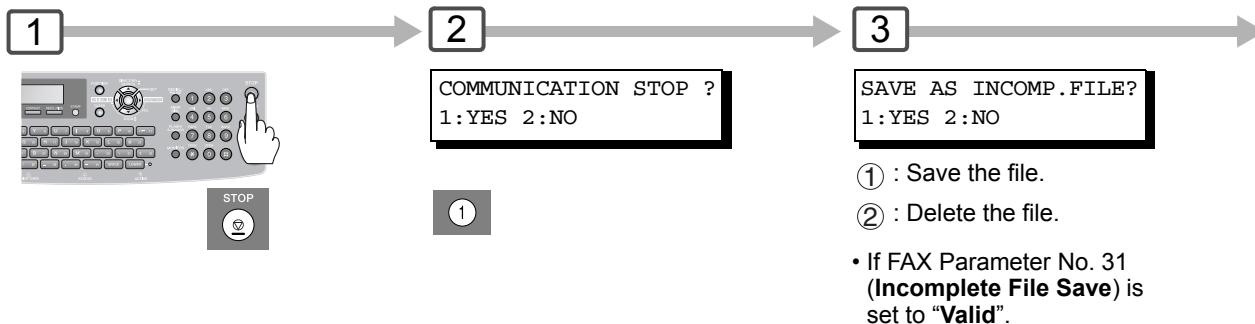


### ■ Document Scanning via LAN


When the Document Management System (DMS) is installed and configured on your PC, document(s) can be scanned from your machine to the PC.

#### Direct Connection (with Crossover Cable)

- Document Scanning directly from your machine to your PC using Windows "My Network Places" or "Network Neighborhood".

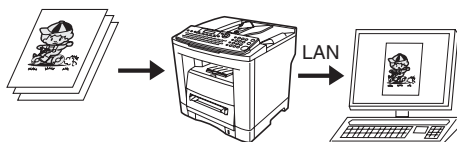

**NOTE:**  
USB Port is used for printing only, and is not available for local scanning.

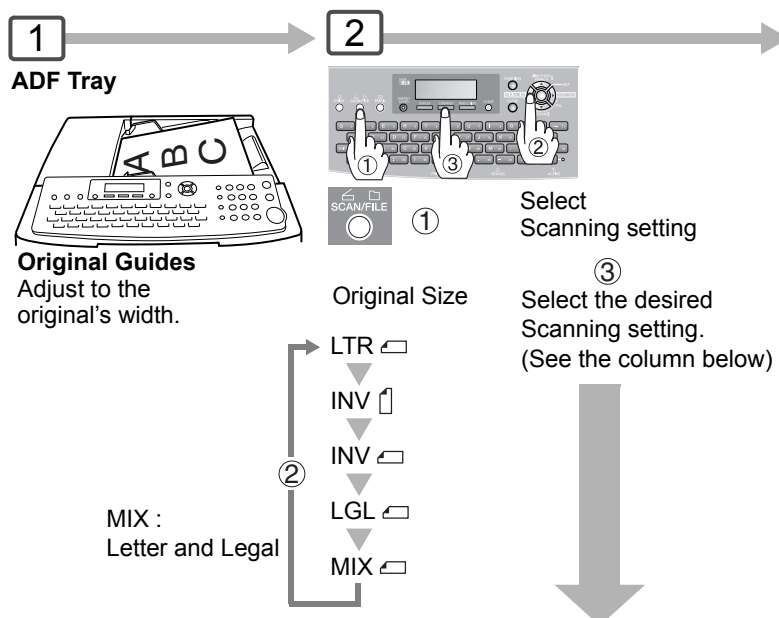

#### Selecting the Scanning Resolution



150 dpi  
300 dpi  
600 dpi  
Halftone (300 dpi)  
Halftone (600 dpi)

#### Selecting the scanning contrast



◀:Lighter ▶:Darker

#### NOTE

- If the Email transmission cannot be completed for any reason, the Email may be returned or undelivered; otherwise no reply will be printed.




PRINT COMM. JOURNAL?  
1: YES 2: NO

① : Print Communication  
Journal  
(COMM. JOURNAL)

Stop the transmission.

### Dialing (PC's IP Address) Ex: Search Addressing

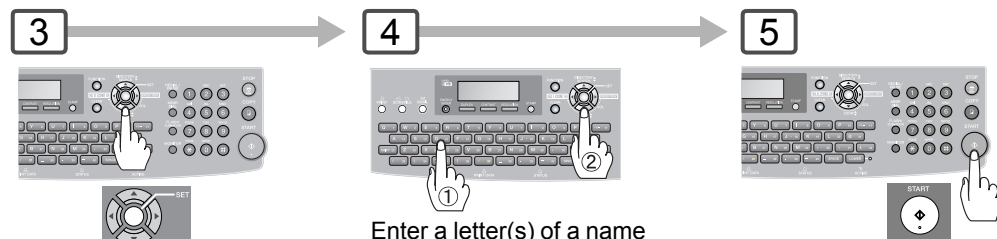

ENTER LETTER (S)  
\_

**NOTE:**  
For Quick Name Addressing,  
One-Touch/ABBR. Addressing.

Enter a letter(s) of a name  
you wish to search.  
**Ex:** "SA"

ENTER LETTER (S)  
SA\_

[06] SALES 3  
10 [05] SALES 2  
10 [01] SALES  
10 . 74 . 252 . 66

**NOTE:**  
You can search for another name  
starting with the same character by  
scrolling with the Cursor Keys (▼/▲).

#### NOTE

2. If the PC's IP address is not shown on the LCD of your machine, register the PC's IP address using your machine's Control Panel.



# Problem Solving

## Information Code

When an anomaly occurs, the display may show one of the Information Codes listed below. These will help you to identify and correct the problem.

Info. Code	Meaning	Possible Action	Page
030	Document is misfeeding.	1. Reload the document properly. 2. Remove the document jam. 3. Adjust ADF.	--
031	Document is too long or jammed. Document length exceeds 39.4 inches (1 meter) in "Normal" and "Fine" mode only. The length limitation for "Super Fine" and "600 dpi" mode, is subject to the available Memory size. 600dpi (Max. Length is 24 inches (600 mm))	1. Reload the document properly. 2. Remove the document jam. 3. Use proper size document(s).	--
061	ADF Cover is open.	Close the ADF Cover.	--
400	During initial handshake, receiving station did not respond or communication error occurred.	1. Check with the other party. 2. Reload the document and send again.	--
401	Remote station required a Receiving Password to receive the document. Remote station does not have Confidential Mailbox.	Check the remote station.	--
402	During initial handshake, communication error occurred.	Reload the document and send again.	--
403	No polling capability at the remote side.	Ask remote side to set "POLLED=ON".	--
404/405	During initial handshake, communication error occurred.	Reload the document and send again.	--
406	Transmission Password does not match. Receiving Password does not match. Received from an unauthorized station in Selective Reception mode.	Check the password or the telephone number in One-Touch or Abbreviated station.	--
407	No confirmation from the receiving station for the previous page sent.	Wait a few minutes and send again.	--
408/409	Remote side confirmation of previous page is illegible.	Wait a few minutes and send again.	--
410	Communication aborted by the transmitting side.	Check with the other party.	--
416/417/ 418/419	Received data has too many errors.	Check with the other party.	--
422/427	Interface is incompatible.	Check with the other party.	--
430/434	Communication error occurred while receiving.	Check with the other party.	--
436/490	Received data has too many errors.	Check with the other party.	--
456	<ul style="list-style-type: none"> <li>Machine received a confidential document or was requested to be polled of a confidential document under any of following conditions.               <ol style="list-style-type: none"> <li>Not enough space in memory to receive the confidential document.</li> <li>Confidential Mailbox is full.</li> <li>While printing received document.</li> </ol> </li> <li>Machine was requested to relay a document.</li> </ul>	1. Print a File List and check the contents. 2. Wait until machine finishes printing.	--



Info. Code	Meaning	Possible Action	Page
638	Power failure occurred during the communication.	Check the power cord and plug.	--
711	Incorrect LDAP settings.	Check the LDAP Server Name, LDAP Log in Name, LDAP password, LDAP Search Base.	--
712	Incorrect Email Address.	Check the email address and send again. Check the IP Address of the SMTP Server with the Network Administrator.	--
714	Cannot Log on to the LAN.	Check the 10Base-T/100Base-TX cable connection. An unexpected LAN problem occurred. Contact the Network Administrator.	--
715	TCP/IP connection timed out.	Check the Internet Fax Parameter settings. Verify the IP Address, Default Gateway IP Address, SMTP Server IP Address.	--
716	Cannot logon to the designated SMTP Server.	Check the SMTP Server IP Address setting. Contact the Network Administrator.	--
717	Incomplete SMTP Protocol transmission. SMTP Server's hard disk may be full.	SMTP Server is defective. Contact the Network Administrator.	--
718	Page Memory Overflow occurred while receiving printing data. The paper size selected within your application to print is larger than the paper size loaded in the Paper Trays.	Check the document size and resolution. Ask originator to resend in a supported size and resolution.	--
719	Received data via LAN is in a format that is not supported.	Ask the originator to resend with a supported file attachment format: * In a TIFF-F format. * Image data equivalent to recording paper size.	--
720	Cannot connect to the POP Server (Incorrect POP Server IP Address) POP Server is down.	Check the POP Server IP Address. Contact the Network Administrator.	--
721	Cannot connect to the POP Server. (User Name or Password error)	Check the POP User Name and Password or the APOP settings. Contact the Network Administrator.	--
722	Failed to obtain IP address from the DHCP Server.	Check the 10Base-T/100Base-TX cable connection. Confirm that the Internet Parameter and the DHCP Server are correctly configured before turning On or turning Off the power. Contact the Network Administrator.	--
725	DNS Server connection timed out. DNS Server is down.	Check the DNS Server IP Address. Contact the Network Administrator.	--
726	Received an error response from the DNS Server.	Check the POP Server Name. Check the SMTP Server Name.	--
728	The document was sent to the Internet Fax in an incompatible file format (PDF). TIFF file format is required for Internet Fax. <b>Note:</b> PDF file format is only used when using the Scan-to-Email feature.	Change the Fax Parameter No. 177 ( <b>XMT File Type</b> ) to " <b>TIFF</b> ".	--



# Problem Solving

## Information Code

Info. Code	Meaning	Possible Action	Page
729	Failed to authenticate (SMTP Authentication) when connecting with the SMTP Server.	Check the SMTP Authentication. User Name and Password. Contact the Network Administrator.	--
730	Cannot retrieve the Journal nor program list for the Internet Parameters and the Auto Dialer via email from a PC.	Check that the Fax Parameter No. 158 ( <b>PC Remote Update</b> ) is set to " <b>Valid</b> ".	--
731	The dialer buffer for manual dialing was full (50 stations) when the Relay Transmission Request was received.	Request the originator to resend the Relay Transmission Request after the reserved communication is finished.	--
800/814/ 816/825	Machine was requested to relay a document or Confidential Communication from non-compatible systems.	Check with the other party.	--
870	Memory overflow occurred while storing documents into memory for transmission.	1. Transmit documents without storing them into memory first. Use Direct Transmission when using G3 Fax Communication. 2. Install Optional Memory (SD Memory Card).	--
871	Overflow of the file management area occurred.	Wait until machine finishes printing or sending the documents.	--

### NOTE

1. After identifying the problem and taking the recommended action, if the information Codes keep reoccurring or Information Codes that appear on your machine are not listed above, please contact your local our Authorized Dealer.  
For mechanical failures, see the Troubleshooting section in the Operating Instructions (For Facsimile and Copy Functions)

## Error Message

### ■ Error Message Sent to the Sender

Error messages that are emailed from your machine to the original sender during remote programming of the Auto Dialer via Email.

	Error Message	Possible Cause / Action
1	554 Data Transfer Error (broken Header)	The header or sub header decoding is being processed while the message finished, try again.
2	554 Data Transfer Error (broken Data)	Multiple contents are present and being processed while the message finished, try again.
3	554 Data Transfer Error (FAX module)	Data transfer error occurred in the FAX module while communicating with the LAN module, try again.
4	554 MIME attachment not supported (message/file)	MIME attachment is not supported during this operation, resend using plain text in the message body only.
5	554 MIME format not supported	MIME file type is not supported, resend using plain text in the message body only.
6	554 G3 Relay permission denied	The requested domain for Relayed Transmission is not registered.
7	554 Relay Address unknown	The telephone number of end receiving station for the Relayed Transmission is unknown.
8	554 Memory Full (FAX module)	FAX Memory is full, try again later.
9	554 Data Transfer Error	Other errors not listed above, try again later.



# Problem Solving

## Error Message

### ■ Internet FAX Return Receipt Error Messages

Error messages that are printed on the Internet Fax Return Receipt when remote programming of the Auto Dialer via email fails.

	Error Message	Possible Cause / Action
1	Format Error : <@command block, the "@end" command is missing.>	The block termination command "@end" is missing in the "@command" block, add the "@end" command and try again.
2	Format Error: <@begin block, the "@begin" command is missing.>	The block start command "@begin" is missing in the "@begin" block, add the "@begin" command and try again.
3	Format Error : <@begin block, the "@end" command is missing.>	The block termination command "@end" is missing in the "@begin" block, add the "@end" command and try again.
4	Format Error : <@system block, the "@end" command is missing.>	The block termination command "@end" is missing in the "@system" block, add the "@end" command and try again.
5	Format Error : <@sender block, the "@end" command is missing.>	The block termination command "@end" is missing in the "@sender" block, add the "@end" command and try again.
6	Format Error:<@domain block, the "@end" command is missing.>	The block termination command "@end" is missing in the "@domain" block, add the "@end" command and try again.
7	Format Error : <@program block, the "@end" command is missing.>	The block termination command "@end" is missing in the "@program" block, add the "@end" command and try again.
8	Format Error:<@system block, the "@system" command is missing.>	The system block start command "@system" is missing in the "@system" block, add the "@system" command and try again.
9	Permission denied : <054 Fax Forward parameter is set to "Valid".>	Set the Fax Forward parameter to "Invalid".
10	Permission denied : <Fax machine is busy performing a task.>	Try again later when the machine is not busy.
11	Error : <Programmed ABBR overwrite prohibited. Use open ABBR only.>	Cannot overwrite existing programmed data, use the "Delete" command to erase the existing data first.
12	Permission denied : <Password is incorrect.>	Correct the password and try again.
13	Permission denied : <158 PC Remote Dialer Update parameter is set to "Invalid".>	Set the PC Remote Update parameter to "Valid".
14	Format Error : <error line>	The format of the Entry is incorrect / incomplete or the data string for each station is not defined within a single line.
15	Warning : <error line>	The format of the Entry is incorrect or the number of characters entered, exceed the maximum allowed in the field. Correct it and try again.
16	Warning : Field limit exceeded<error line>	The maximum number of Station Name, Domain Name, Sender Name, Program Name, etc. were exceeded.

## MEMO



## NEW FACSIMILE MACHINE LIMITED WARRANTY

1. KYOCERA MITA AMERICA, INC. and KYOCERA MITA CANADA, LTD. (both referred to as "KYOCERA") warrant your new facsimile machine against any defects in material and workmanship for a period of 90 days from date of installation by an Authorized Dealer. In the event your facsimile machine is found to be defective within the warranty period, KYOCERA's only obligation and your exclusive remedy shall be replacement of any defective parts. It is understood that KYOCERA shall have no obligation to furnish labor.
2. This warranty is valid only as to the original retail purchaser of a new KYOCERA facsimile machine in the United States of America, or Canada, based upon the country of purchase.
3. In order to obtain performance of this warranty, the original retail purchaser must immediately notify the Authorized Dealer from whom the facsimile machine was purchased of the defects. If the dealer from whom you purchased the facsimile machine is not able to provide warranty service, write to KYOCERA at the below address, for the name and address of an Authorized Dealer for facsimile machines in your area, or visit our website at [www.kyoceramita.com](http://www.kyoceramita.com).
4. This warranty does not cover facsimile machines: (a) which have become damaged due to operator negligence, misuse, or accidents; (b) which do not work properly because of the use of parts or supplies not meeting KYOCERA's specifications; (c) which have been serviced by a technician not employed by KYOCERA, or an Authorized Dealer; or (d) which have had the serial number modified, altered or removed.
5. This warranty gives you specific legal rights. You may also have other rights which vary from state to state, or province to province. Neither the seller, nor any other person, is authorized to extend the time period, or expand this warranty on behalf of KYOCERA.
6. THIS WARRANTY IS MADE IN LIEU OF ALL OTHER WARRANTIES (AND CONDITIONS), EXPRESS OR IMPLIED, AND KYOCERA SPECIFICALLY DISCLAIMS ANY IMPLIED WARRANTY (OR CONDITION) OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY SHALL NOT EXTEND TO ANY INCIDENTAL OR CONSEQUENTIAL DAMAGE WHICH MAY ARISE OUT OF THE USE OR INABILITY TO USE THE FACSIMILE MACHINE.

KYOCERA MITA AMERICA, INC.	KYOCERA MITA CANADA, LTD.
225 Sand Road,	6120 Kestrel Road
P.O. Box 40008,	Mississauga, Ontario L5T 1S8,
Fairfield, New Jersey,	Canada
07004-0008 U.S.A	

### QUALITY CERTIFICATE

This machine has passed  
all quality controls and  
final inspection.

## KYOCERA MITA AMERICA, INC.

### **Headquarters:**

225 Sand Road,  
Fairfield, New Jersey 07004-0008  
TEL : (973) 808-8444  
FAX : (973) 882-6000

### **New York Branch:**

1410 Broadway 23rd floor  
New York, NY 10018  
TEL : (917) 286-5400  
FAX : (917) 286-5402

### **Northeastern Region:**

225 Sand Road,  
Fairfield, New Jersey 07004-0008  
TEL : (973) 808-8444  
FAX : (973) 882-4401

### **Midwestern Region:**

201 Hansen Court Suite 119  
Wood Dale, Illinois 60191  
TEL : (630) 238-9982  
FAX : (630) 238-9487

### **Western Region:**

14101 Alton Parkway,  
Irvine, California 92618-7006  
TEL : (949) 457-9000  
FAX : (949) 457-9119

### **Southeastern Region:**

1500 Oakbrook Drive,  
Norcross, Georgia 30093  
TEL : (770) 729-9786  
FAX : (770) 729-9873

### **Southwestern Region:**

2825 West Story Road,  
Irving, Texas 75038-5299  
TEL : (972) 550-8987  
FAX : (972) 252-9786

### **National Operation Center & National Training Center:**

2825 West Story Road,  
Irving, Texas 75038-5299  
TEL : (972) 659-0055  
FAX : (972) 570-5816

### **Latin America Division:**

8240 N.W. 52nd. Terrace Dawson Building,  
Suite 108 Miami, Florida 33166  
TEL : (305) 421-6640  
FAX : (305) 421-6666

## KYOCERA MITA CANADA, LTD.

6120 Kestrel Road, Mississauga,  
Ontario L5T 1S8, Canada  
TEL : (905) 670-4425  
FAX : (905) 670-8116

## KYOCERA MITA MEXICO, S.A. DE C.V.

Av. 16 de Septiembre #407  
Col. Santa Inés,  
Azcapotzalco México,  
D.F. 02130, México  
TEL : (55) 5383-2741  
FAX : (55) 5383-7804